



ENZEIT PRIME GM 3V





Mounting type

ground mounted



Module layout

vertical



Number of supports

double support, 3 mm thick



Module height

1700-2500 mm



Material

steel with anticorrosion coating



Module width

1000-1350 mm



Angle of inclination from vertical

15°-35°



Bifacial modules

no



Warranty

10 years

Standards



PN-EN-1090-1+A1:2012 PN-EN 1991-1-1:2004 PN-EN-1991-1-3:2005 PN-EN-1991-1-4:2008 PN-EN 1993-1-1:2006









ENZEIT PRIME: THE POWER OF POSSIBILITIES

FEG.


The given configuration is just one of the proposals within the flexible Enzeit **Prime System**. We offer a **high degree of flexibility** in the choice of material, thickness or corrosion protection coating.

Each project is carried out individually, taking into account the client's needs and capabilities. We adapt the project to the weather conditions, location and other variables crucial for efficient implementation.

Examples of variants Prime system configurations:





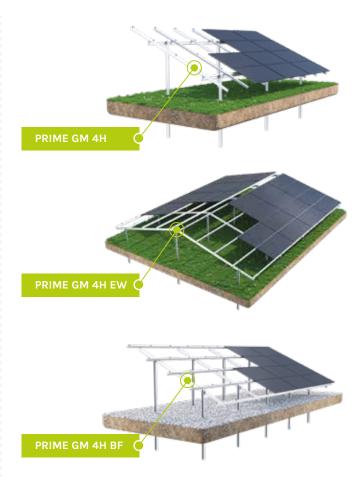

Have you not found a system that meets the requirements of your project?

No problem. We will create it for you!

Send the guidelines to your sales representative, and we will prepare proposed solutions.

