

Ground mounted system



ENZEIT PRIME GM 4H BF





Mounting type

ground mounted

Module

layout

horizontal

Number of supports

double support, 3 mm thick

Module height

1700-2500 mm

Ľ

Material

steel with anticorrosion coating

······. ← →

Module width

1000-1350 mm

Angle of inclination from vertical

15°-35°

Bifacial modules

yes

10 lat

Warranty

10 years

Standards



PN-EN-1090-1+A1:2012 PN-EN 1991-1-1:2004 PN-EN-1991-1-3:2005 PN-EN-1991-1-4:2008 PN-EN 1993-1-1:2006

070

Welcome to the world of Enzeit Technik, where innovation meets precision, and fresh perspectives are transformed into unique projects. We create solutions for professionals, drawing from the rich experience of the GTV group. The manufacturing process of PV systems at Enzeit Technik is covered by the Factory Production Control system overseen by TUV SUD Poland.

enzeit.com






ENZEIT PRIME: THE POWER OF POSSIBILITIES

The given configuration is just one of the proposals within the flexible Enzeit **Prime System**. We offer a **high degree of flexibility** in the choice of material, thickness or corrosion protection coating. Each project is carried out individually, taking into account the client's needs and capabilities. We adapt the project to the weather conditions, location and other variables crucial for efficient implementation.

Examples of variants Prime system configurations:

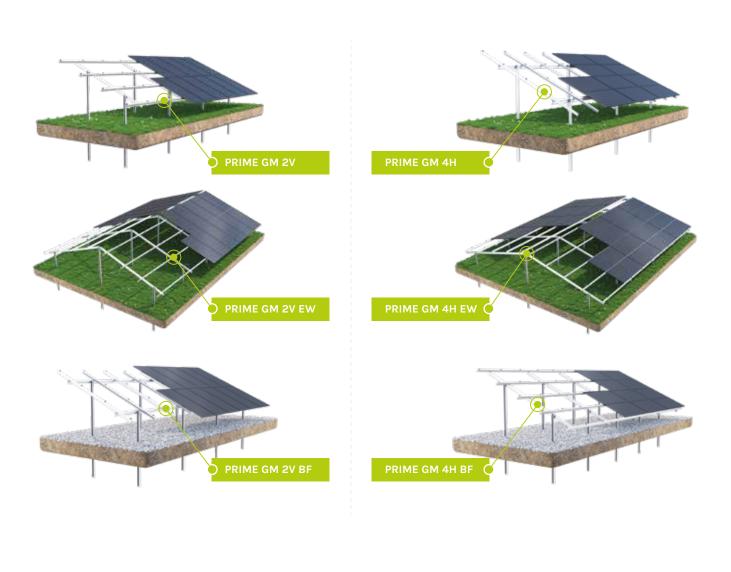



Send the guidelines to your sales representative, and we will prepare proposed solutions.

Welcome to the world of Enzeit Technik, where innovation meets precision, and fresh perspectives are transformed into unique projects. We create solutions for professionals, drawing from the rich experience of the GTV group. The manufacturing process of PV systems at Enzeit Technik is covered by the Factory Production Control system overseen by TUV SUD Poland.

enzeit.com